

Yealink BH70 Wireless Bluetooth Headset

Yealink BH70 Wireless Bluetooth Headset Instruction Manual

Home » Yealink » Yealink BH70 Wireless Bluetooth Headset Instruction Manual 🛸

Contents

1 Yealink BH70 Wireless Bluetooth Headset 2 Product Usage Instructions: **3 Safety Guide 4 Package List 5 Overview** 6 Charging 7 Pairing and Connecting Device 8 Call & Music Control **9 Customers Button 10 Replace Ear Cushions 11 Software Management 12 Warranty 13 General Requirements 14 Cleaning Requirements 15 Troubleshooting 16 Contact Information** 17 Documents / Resources **17.1 References**



Yealink BH70 Wireless Bluetooth Headset



Specifications

- Product: BH70 Mono & BH70 Dual Bluetooth Headset
- Quick Start Guide Version: 1.0
- Charging Time: 1.5 hours for a full charge
- Bluetooth Range: Approximately 10 meters
- Compatibility: Yealink USB Connect (PC) or Yealink Connect (APP)

Product Usage Instructions:

Precautions and Safety Guide

- Avoid disassembling the product, exposure to fire or water to prevent damage.
- Avoid usage in high temperature, humidity, or corrosive environments.
- Avoid exposure to corrosive liquids to prevent severe damage.

Package Contents

- BHD702 Headset or BHM701 Headset
- Drawstring Bag
- USB 2.0 Cable (USB-A to USB-C)
- BT51-A Dongle
- Quick Start Guide
- BHC70 Charging Stand Replacement Ear Cushions

Charging

It is recommended to fully charge the headset before initial use. Charging time is approximately 1.5 hours. Use the USB charging cable provided or opt for the optional charging stand.

Power On/Off

To power on, press the power button until the LED indicator turns green. To power off, press and hold the power button until the LED indicator turns red.

Pairing and Connecting Device

If your desk phone lacks built-in Bluetooth, use the BT51 dongle to pair the headset. The BT51 dongle and headset are pre-paired and will automatically connect after powering on.

Call & Music Control

- To answer/end calls: Press once
- To redial: Double-press
- · To activate voice assistant: Hold for 2 seconds
- To play/pause music: Press once
- To adjust volume: Press volume buttons
- To mute/unmute: Hold for 1.5 seconds

Customers Button

Press once for Teams Edition or hold for 2 seconds for Teams/UC Edition. For mobile devices, it may activate Siri, Google Assistant, etc.

Replace Ear Cushions

Refer to the Quick Start Guide for instructions on replacing earcushions.

Software Management

Download software from Yealink's website or Yealink Connect App to manage the headset. Ensure compatibility with Yealink USB Connect of version 0.36.x.x or later.

FAQ

• Q: What is the recommended charging time for the headset?

A: It is advised to charge the headset fully before initial use, which typically takes around 1.5 hours.

• Q: How can I pair the headset with a desk phone lacking built-in Bluetooth?

A: Use the BT51 dongle provided with the headset to pair with devices lacking built-in Bluetooth capability.

BH70 Mono & BH70 Dual

Bluetooth Headset

Quick Start Guide V1.0

Please update the headset to the latest version via Yealink USB Connect (PC) or Yealink Connect (APP) before using.

Notes

- 1. The signal range of Bluetooth headset typically spans around 10 meters. Please ensure the distance between your device and the headset is close to prevent signal interruption or degradation.
- 2. It is advised to minimize proximity to other Bluetooth devices or wireless signal sources, such as Wi-Fi routers, to reduce the likelihood of interference.
- 3. Please do not place any metal and magnetic cards on the charging stand to avoid abnormalities and damage to

the charger.

4. Please do not charge too far away from the charging sign to get a more efficient charging experience.


Safety Guide

- 1. Do not disassemble the product by yourself or bring it near fire and water to avoid short circuit leakage or damage to the product.
- 2. Do not use the product in high temperature, humidity, and corrosive environment to avoid damaging the circuit and causing failure to charge or other failures.
- 3. Do not expose the product to corrosive liquids. Otherwise, it will cause severe damage.
- 4. Do not disassemble or re-equip the product for any reason to avoid secondary failure and burnout.
- 5. Do not place the product below -10°C or above 60°C.
- 6. Do not knock, throw or shake the product because rough methods will damage the internal circuit board structure.

Package List


Standard



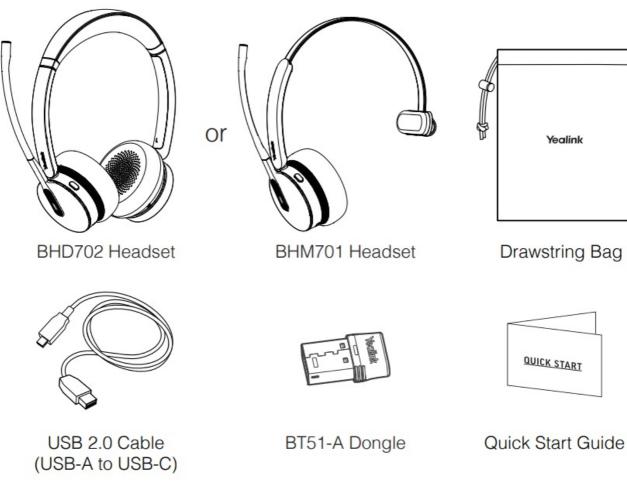

Optional







BHC70 Charging Stand

Replacement Ear Cushions


Note: We recommend that you use the included accessories, and other accessories may have compatibility issues that prevent them from working properly.

Overview

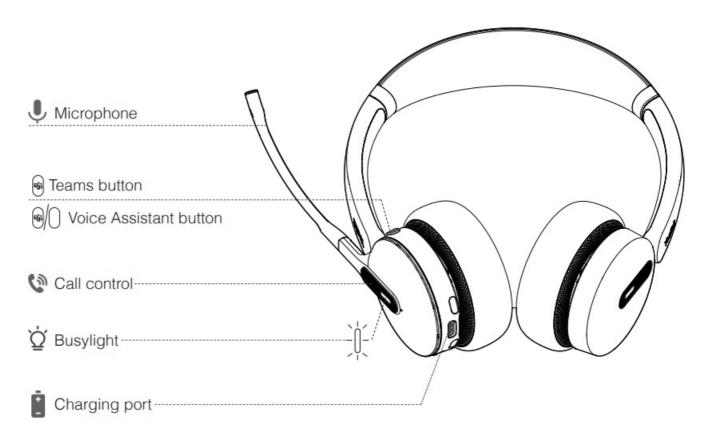

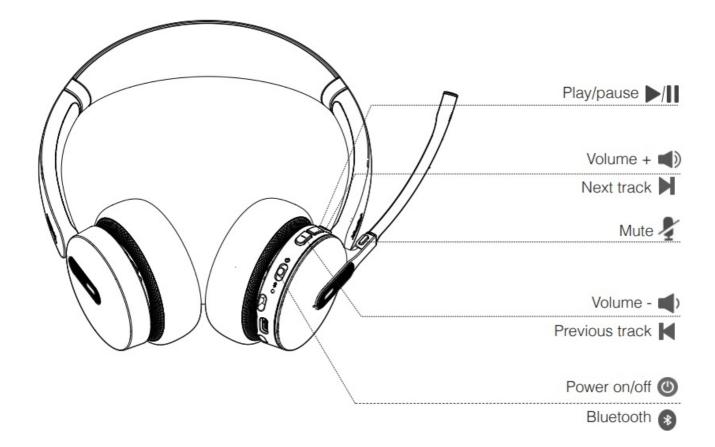


Charging

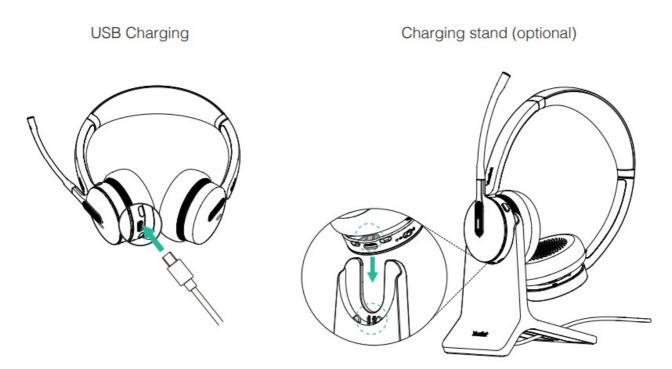


Note: We recommend to fully charge the headset when using it for the first time.

LED Indicator Status

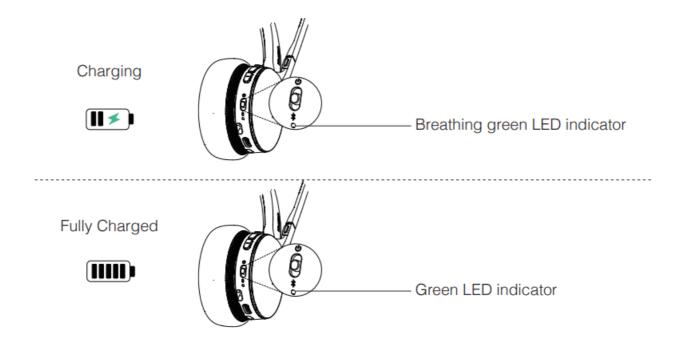


Note: It takes 1.5 hours to fully charge the headset.

Power on/off

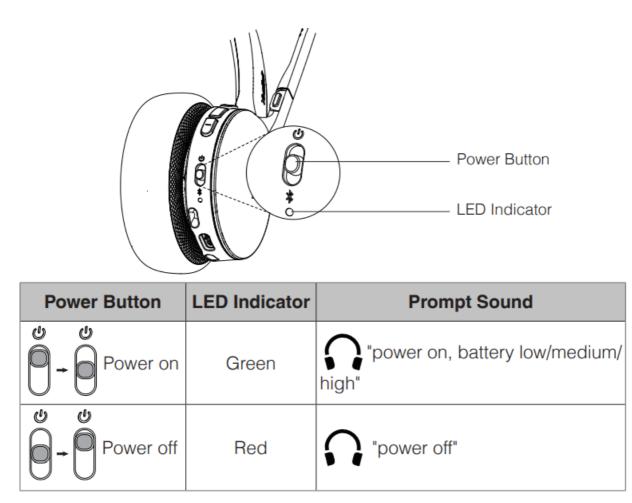


Pairing and Connecting Device

Enter Pairing Mode

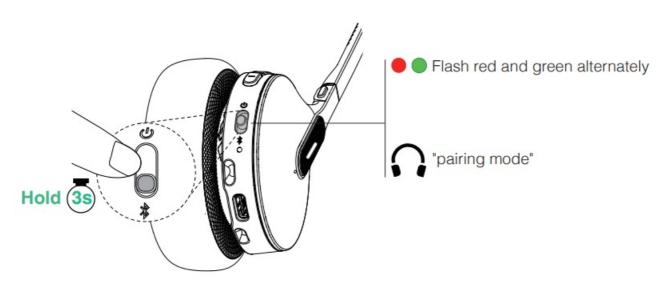

• Pair with PC

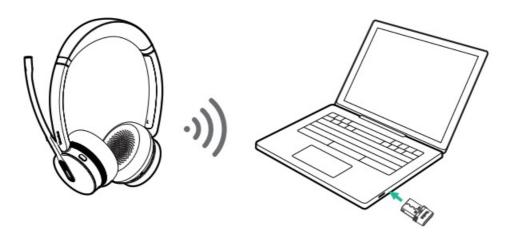

• Pair with Desk Phone




Note

- If your desk phone does not have built-in Bluetooth, you need to use the BT51 dongle to pair the headset.
- The BT51 and headset are already pre-paired when leaving the factory. They can automat-ically connect after powering on.

Pair with Mobile Device



Call & Music Control

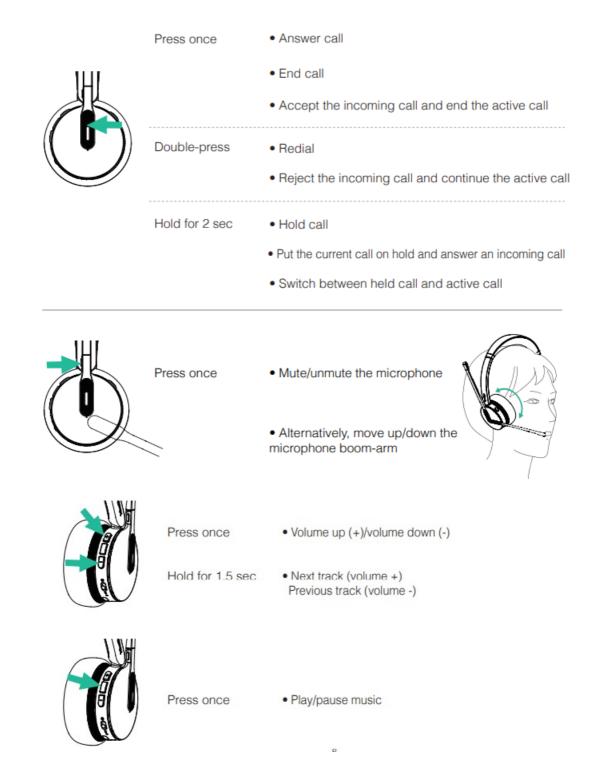

Customers Button



Press once

Open Teams Notification

Teams Edition



Hold for 2 sec

Teams/UC Edition


Activate Voice Assistant

• Dismiss/invoke raise hand during the meeting



Siri, Google assistant..., depending on mobile phone.

Replace Ear Cushions

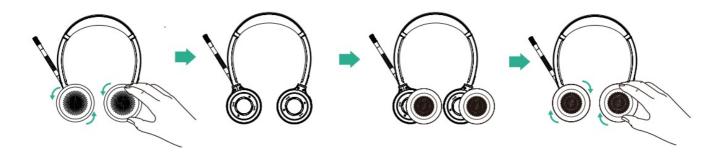

Software Management


• Yealink USB Connect (PC)

Ω	Equipment Model 5H070 Add a remark of	Hermann Hernion 32.410.235.17	
8170	Connection Method	Sinelocify visitos Unpolend	
Denke Satings Set Manuels	Proses 50%	Textel Normber 5103317040000136	a
 Upstate Device Device Support 	Hardware Version 32.0.16.0.0.0	0	
Ch. manual address		Official Website	

Download it from the Yealink website <u>https://www.yealink.com/product/yuc</u>.

Note: It needs to be used with Yealink USB Connect of version 0.36.x.x or later.

Yealink Connect App (Mobile)

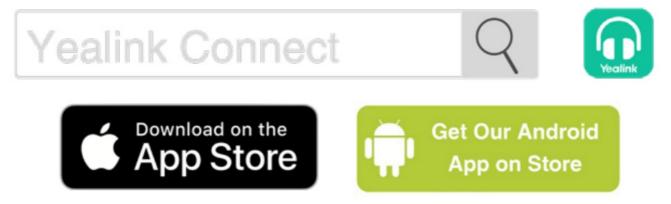

Apple and the Apple logo are trademarks of Apple Inc. Download the Yealink Connect App from IOS App Store or Android App Store.

Regulatory Notices

Operating Ambient Temperatures

- Operating temperature: +14 to 113°F (-10 to 45°C)
- Relative humidity: 5% to 90%, noncondensing
- Storage temperature: -22 to +160°F (-30 to +70°C)

Warranty

Our product warranty is limited only to the unit itself, when used normally in accordance with the operating instructions and the system environment. We are not liable for damage or loss resulting from the use of this product, or for any claim from a third party. We are not liable for problems with Yealink device arising from the use of this product; we are not liable for financial damages, lost profits, claims from third parties, etc., arising from the use of this product.

Explanation of the symbols

- DC symbol
- • • is the DC voltage symbol.
- WEEE Warning symbol

To avoid the potential effects on the environment and human health as a result of the presence of hazardous substances in electrical and electronic equipment, end users of electrical and electronic equipment should understand

the meaning of the crossed-out wheeled bin symbol. Do not dispose of WEEE as unsorted municipal waste and have to collect such WEEE separately.



Restriction of Hazardous Substances Directive (RoHS)

This device complies with the requirements of the EU RoHS Directive. Statements of compliance can be obtained by contacting support@yealink.com.

Safety Instructions

Save these instructions. Read these safety instructions before use!

General Requirements

- Before you install and use the device, read the safety instructions carefully and observe the situation during operation.
- During the process of storage, transportation, and operation, please always keep the device dry and clean, avoid collision and crash.
- Please attempt not to dismantle the device by yourself. In case of any discrepancy, please contact the appointed maintenance center for repair.
- Please refer to the relevant laws and statutes while using the device. Legal rights of others should be respected as well.

Environmental Requirements

- Do not cover ventilation openings, this equipment is not intended to be used on soft support.
- The marking information is located at the exterior of the bottom
- Place the device at a well-ventilated place. Do not expose the device under direct sunlight.
- Keep the device dry and free of dusts.

- Do not place the device on or near any inflammable or fire-vulnerable object, such as rubber-made materials.
- Keep the device away from any heat source or bare fire, such as a candle or an electric heater.

Operating Requirements

- Do not let a child operate the device without guidance.
- Do not let a child play with the device or any accessory in case of accidental swallowing.
- Please use the accessories provided or authorized by the manufacturer only.
- Do not spill liquid of any kind on the product or use the equipment near water, for example, near a bathtub, washbowl, kitchen sink, wet basement or near a swimming pool.
- When there is smoke emitted from the device, or some abnormal noise or smell, disconnect the device from the power supply, and unplug the power plug immediately.
- Contact the specified maintenance center for repair.
- Do not insert any object into equipment slots that is not part of the product or auxiliary product.

Battery Requirements

- Do not immerse the battery into water, which could short-circuit and damage the battery.
- Do not expose the battery to an open flame or leave the battery where it could be subjected to extremely high temperatures, which could cause the battery to explode.
- Do power the handset off before removing the battery.
- Do not try to use the battery for the power supply of any device other than this handset.
- Do not open or mutilate the battery, released electrolyte is corrosive and may cause damage to your eyes or skin.
- Use only the rechargeable battery pack delivered with the handset or those rechargeable battery packs expressly recommended by Yealink.
- Defective or exhausted battery should never be disposed of as municipal waste. Return old battery to the battery supplier, a licensed battery dealer or a designated collection facility.

Cleaning Requirements

Use a piece of soft, dry and anti-static cloth to clean the device.

Troubleshooting

The usage environment is out of operating temperature range.

1. Use in the operating temperature range.

The cable between the unit and the Yealink device is connected incorrectly. 1. Connect the cable correctly. You cannot connect the cable properly.

- 1. You may have connected a wrong Yealink device.
- 2. Use the correct power supply.

Some dust, etc., may be in the port.

1. Clean the port.

Contact your dealer or authorized service facility for any further questions.

FCC CAUTION:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- 1. This device may not cause harmful interference, and
- 2. This device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED WARNING

This device complies with Innovation, Science and Economic Development Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- 1. This device may not cause interference, and
- 2. This device must accept any interference, including interference that may cause undesired operation of the device.

EU Regulatory Information

Support Frequency Bands and Power: Bluetooth 2.4GHz< 20 dBm

Contact Information

- YEALINK NETWORK TECHNOLOGY CO., LTD.
- No.666 Hu'an Rd, Huli District Xiamen City, Fujian, P.R.C
- YEALINK (EUROPE) NETWORK TECHNOLOGY B.V.
- Keizersgracht 62,1015CS Amsterdam

- YEALINK (USA) NETWORK TECHNOLOGY CO., LTD.
- 999 Peachtree Street Suite 2300, Fulton, Atlanta, GA, 30309, USA
- Made in China

About Yealink

Yealink (Stock Code: 300628) is a global-leading provider of Unified Communication & Collaboration Solutions specialized in video conferencing, voice communications, and collaboration, dedicated to helping every person and organization embrace the power of "Easy Collaboration, High Productivity".

With best-in-class quality, innovative technology, and user-friendly experiences, Yealink is one of the best providers in more than 140 countries and regions, ranks No.1 in the global market share of IP Phone, and is the Top 5 leader in the video conferencing market (Frost & Sullivan, 2021).

Copyright

Copyright © 2023 YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD.

All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Yealink(Xiamen) Network Technology CO., LTD.

Need more help?

- Yealink Knowledge Base
- Yealink Documentation & Video
- Yealink Headset Compatibility Guide







YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD. Web: <u>www.yealink.com</u> Copyright©2023YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD. All rights reserved.



Documents / Resources



<u>Yealink BH70 Wireless Bluetooth Headset</u> [pdf] Instruction Manual BH70 Wireless Bluetooth Headset, BH70, Wireless Bluetooth Headset, Bluetooth Headset, Hea dset

References

- Yealink | UC & C Terminal, Video Collaboration, Conference Phone, IP Phone, Headsets & Video Conferencing
- USB Connect | Yealink
- User Manual

Manuals+, Privacy Policy

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.